


10 April 2017

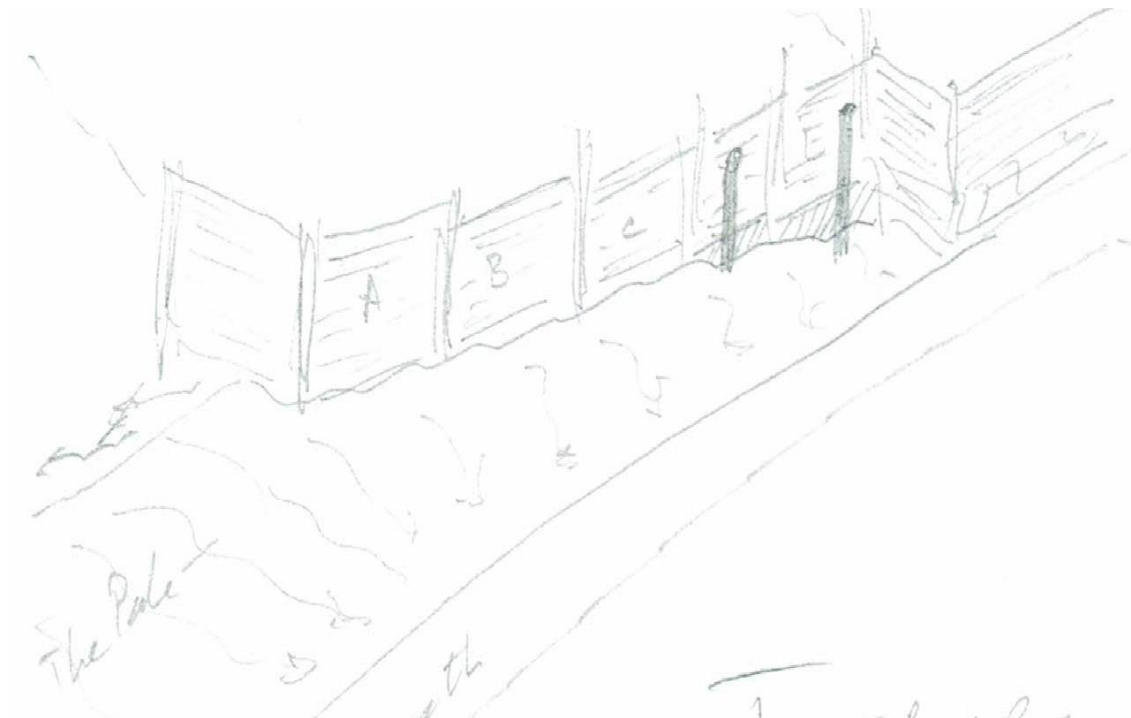

**Specification of work:-** to correct disturbed panels-erected at the top of the Park Pale

**General:-** excavation on the pale must be kept to an absolute minimum and the work area kept clear of debris at all times. The existing panels are 5 ft high above rough block work which is looser as it gets closer to panel E.

The existing panels (A B C D E) will be replaced and concrete posts erected to support both 6 ft – panels and gravel board.

The existing tree stumps are to be cut down to ground level. Security of the garden must be protected at all times.

Specification:-

- Remove 2 tree stumps
- Remove 5ft panel A-E inclusive and replace with similar 6ft high panels.
- Remove slotted concrete posts without undue disturbance of foundation soil.
- Excavate/clear out existing posts holes to receive 5 posts long enough to hold firmly into the soil.
- Concrete and reduce the foundations of each replacement concrete post; temporarily strut in position.
- Clear out roots and debris sufficient to allow for concrete gravel boards and 6 ft fence panels.
- Clear away all debris, roots, concrete, and the like and take away from the site to be disposed of in a proper manner.
- Leave the site tidy and secure, allow public access to the path at all times. \*\*

NB – The path could be closed and people directed into -the cul de sac of Chatsworth Drive

- All work to be completed in one working day.

10 April 2017

